


MINISTYLO

SMALL FRAGMENT MODULAR EXTERNAL FIXATOR

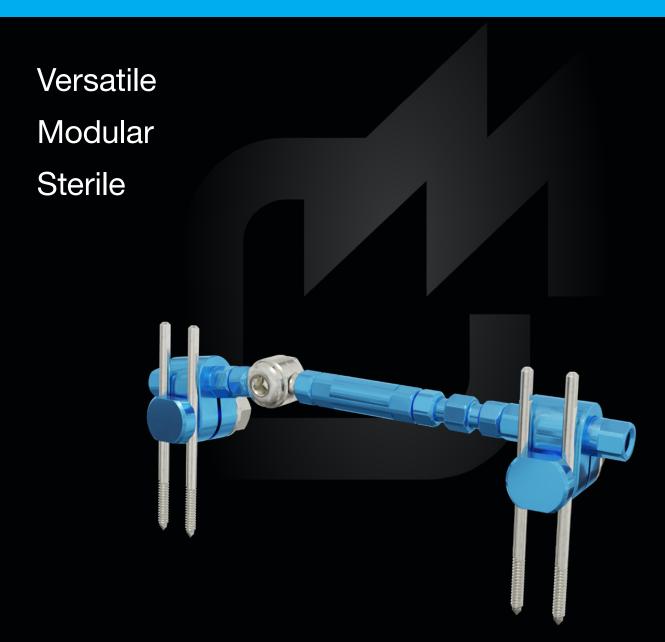

Indications

Open fractures, closed fracture, non-unions and malformations of metacarpals and phalanges.

FEATURES

ADVANTAGES

Universal clamp	Accepts screws and K-wires in the following range: \varnothing 1,0 mm and 2,0 mm
Sterile disposable kit	Ready for use
Detachable components	Highly modular

Body of the Fixator



For micrometric axial correction


Ball Joint Unit

For flexion and extension movements





Ministylo Kit

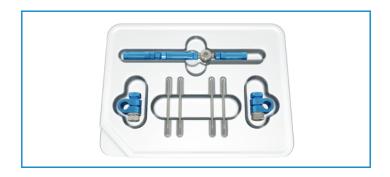

Description	Qty
Body of Fixator	1
2,0 mm Ø – 40 mm L – 10 mm L thread screws	4
Clamp (double screw/K-wire)	2

Surgical technique



Perform a 1 cm incision in proximity of the metaphysis of the second metacarpal along the dorsal-radial margin, at approximately a 45° angle to the horizontal plane.

Using the drill guide (5002235), insert two 2 mm screws in the metacarpal. Use a power tool to go past the first cortex and then proceed by using the T-wrench.



Use the external fixator as a unit of measure to determine the position of the second set of screws. Perform a 1 cm incision in the metaphysis of the distal phalanx. Insert two \emptyset 2.0 mm screws in the metacarpal at approximately a 45° angle to the horizontal plane.

Use a power tool to go past the first cortex and then proceed by using the T-wrench.



Insert the clamps in both sets of screws. Attach the body of the fixator to the two clamps making sure the ball joint unit is in proximity of the metacarpal-phalangeal joint (flexion 25°-35°).



Position the ball joint unit as described in the previous step and secure it by using the 3 mm hexagonal screwdriver.



Use the flat wrench to lock the nuts and tighten the clamps by using the T-wrench.



Once the reduction is completed, secure the locking nuts of the compression and distraction unit to allow the implant to become stable.

Clinical Cases

CASE 1

Dr. D. Canale, Dr. U. Scarlato - Ivrea (Turin) Hospital





54-year old male Crush injury to left hand Preoperative x-rays



Preoperative assessment





Fixation using external fixator Postoperative x-rays



Postoperative assessment





Assessment and x-ray check 35 days prior to removal



X-ray on removal after 35 days

CASE 2


Dr. D. Canale, Dr. U. Scarlato - Ivrea (Turin) Hospital





19-year-old sportswoman Skiing accident with trauma to 1st finger of right hand CLW right thumb p1 base fracture volar-ulnar region (open fracture)







Fixation using k-wires + external fixator
Postoperative x-rays
Postoperative assessment





X-ray check 40 days prior to removal





X-ray check on removal





Assessment 30 days after removal





24 years old male TDirect trauma 1st finger right hand Preoperative X-ray and preoperative CT scan



Fixation using K-wires and external fixator



Postoperative x-ray





X-ray check after 40 days and on removal



X-ray check on removal

Codes

5002200MST KIT MINISTYLO

ACCESSORIES

Code	Description
5002206ST	15 mm extension rod
5002210ST	Ministylo clamp single (single screw/K-wire)
5002210AST	Ministylo open-ended clamp single (single screw/K-wire)
5002211ST	Ministylo T clamp (two screws/K-wires)
5002421ST	Self-drilling cortical screw Ø 2.0 mm L 30 mm thread L 10 mm
5002422ST	Self-drilling cortical screw Ø 2.0 mm L 40 mm thread L 10 mm
5002423ST	Self-drilling cortical screw Ø 2.0 mm L 50 mm thread L 10 mm
5002424ST	Self-drilling cortical screw Ø 2.0 mm L 60 mm thread L 10 mm
5002431ST	Threaded wire Ø 1.5 mm L 100 mm thread L 4.0 mm

INSTRUMENTS*

Code	Description	Qty
5002299	Complete Ministylo instrument sterilization set	
Composition:		
5002220	5.5-8.0 mm flat wrench	2
5002225	Ø 8.0 mm T-wrench	1
5002230	Single Ø 2.0 mm drill guide	1
5002235	Double Ø 2.0 mm drill guide	1
5000124	Ø 3.0 mm hexagonal screwdriver	1
5000211	Cross rim wrench for screws	1
5002056	Screw extension adapter	1
5002290	Empty Ministylo instrument sterilization set	1

^{*} Implantable and sterile devices are covered by CE 1936 mark, non-sterile reusable instruments are CE marked

Sterilization

The Ministylo kit is supplied sterile.

It is recommended that the instruments be sterilized in a saturated steam autoclave as follows:

TEMPERATURE: 134° **EXPOSURE:** 5 minutes



HEADQUARTERS

Via P. Gobetti, 56r - 16145 Genova Tel. +39 010 30801 - Fax +39 010 3080210 www.mikai.it - servizio.clienti@mikai.it

MANUFACTURING FACILITY

Via Canestrello, 2 - 36050 Monteviale (VI) Tel. +39 0444 950100 - Fax +39 0444 950133 www.mikai.it - servizio.clienti@mikai.it